



LNP™ THERMOCOMP™ Compound LX04015


Europe-Africa-Middle East: COMMERCIAL

Also known as: LNP™ THERMOCOMP™ Compound PDXL04015

Product reorder name: LX04015

LNP* THERMOCOMP* LX04015 is a compound based on Polyetheretherketone containing Carbon Fiber. Added features include: Electrically Conductive

| TYPICAL PROPERTIES ¹ | TYPICAL VALUE | Unit | Standard |
|---------------------------------------|-----------------|-------------------|--------------|
| MECHANICAL | | | |
| Tensile Stress, yield, 5 mm/min | 200 | MPa | ISO 527 |
| Tensile Strain, break, 5 mm/min | 2 | % | ISO 527 |
| Tensile Modulus, 1 mm/min | 13800 | MPa | ISO 527 |
| Flexural Stress, yield, 2 mm/min | 275 | MPa | ISO 178 |
| Flexural Strain, break, 2 mm/min | 3.1 | % | ISO 178 |
| Flexural Modulus, 2 mm/min | 11100 | MPa | ISO 178 |
| IMPACT | | | |
| Izod Impact, unnotched 80*10*4 +23°C | 30 | kJ/m ² | ISO 180/1U |
| Izod Impact, notched 80*10*4 +23°C | 5 | kJ/m ² | ISO 180/1A |
| THERMAL | | | |
| CTE, 23°C to 60°C, flow | 1.E-05 | 1/°C | ISO 11359-2 |
| CTE, 23°C to 60°C, xflow | 5.4E-05 | 1/°C | ISO 11359-2 |
| HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm | 300 | °C | ISO 75/Af |
| PHYSICAL | | | |
| Mold Shrinkage, flow (5) | 0.1 - 0.3 | % | SABIC Method |
| Density | 1.34 | g/cm ³ | ISO 1183 |
| ELECTRICAL | | | |
| Surface Resistivity | 1.E+04 - 1.E+07 | Ohm | ASTM D 257 |

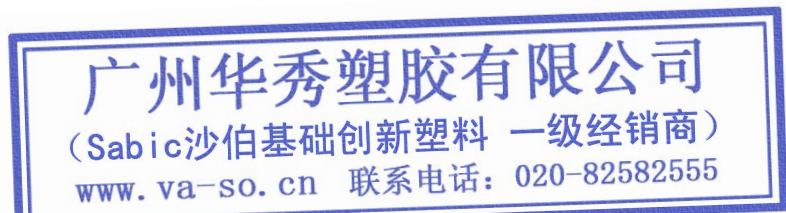

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING B.V. ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

LNP is a trademark of SABIC

Thermocomp is a trademark of SABIC

© 2013 SABIC Innovative Plastics Holding BV. All rights reserved



LNP™ THERMOCOMP™ Compound LX04015

Europe-Africa-Middle East: COMMERCIAL

广州华秀塑胶有限公司
(Sabic沙伯基础创新塑料 一级经销商)
www.va-so.cn 联系电话: 020-82582555

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING B.V. ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED. (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

LNP is a trademark of SABIC

THERMOCOMP is a trademark of SABIC

©2013SABIC Innovative Plastics Holding BV.All rights reserved



LNP™ THERMOCOMP™ Compound LX04015

Europe-Africa-Middle East: COMMERCIAL

| PROCESSING PARAMETERS | TYPICAL VALUE | Unit |
|-----------------------------|---------------|------|
| Injection Molding | | |
| Drying Temperature | 120 - 150 | °C |
| Drying Time | 4 | hrs |
| Maximum Moisture Content | 0.1 | % |
| Melt Temperature | 380 - 390 | °C |
| Front - Zone 3 Temperature | 380 - 395 | °C |
| Middle - Zone 2 Temperature | 365 - 375 | °C |
| Rear - Zone 1 Temperature | 350 - 360 | °C |
| Mold Temperature | 140 - 165 | °C |
| Back Pressure | 0.3 - 0.7 | MPa |
| Screw Speed | 60 - 100 | rpm |



(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING B.V. ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED. (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

LNP is a trademark of SABIC

THERMOCOMP is a trademark of SABIC

©2013SABIC Innovative Plastics Holding BV.All rights reserved